

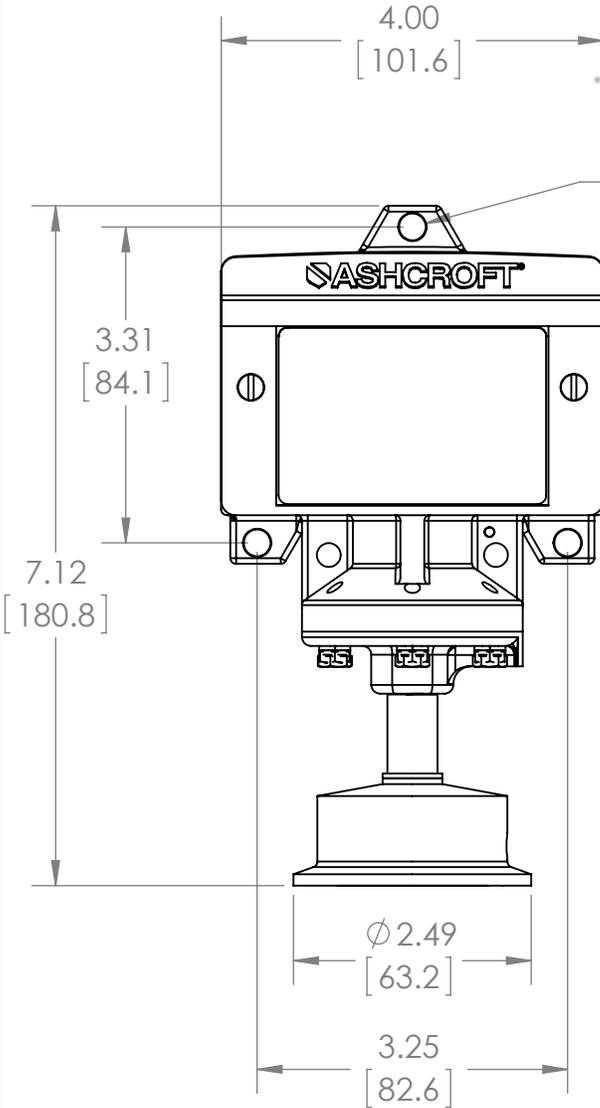


This drawing includes confidential information which is the property of ASHCROFT INC. This copy is loaned for a specific purpose, with the understanding that it will not be reproduced or used for any other purpose or disclosed to others, and it will be returned on demand.

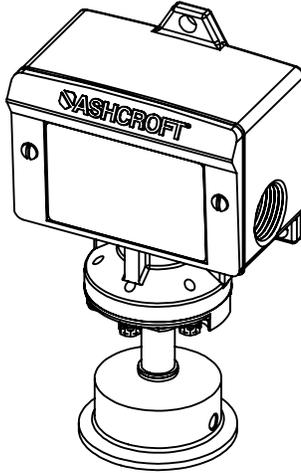

Ø .28 [7.1]
X3 HOLES

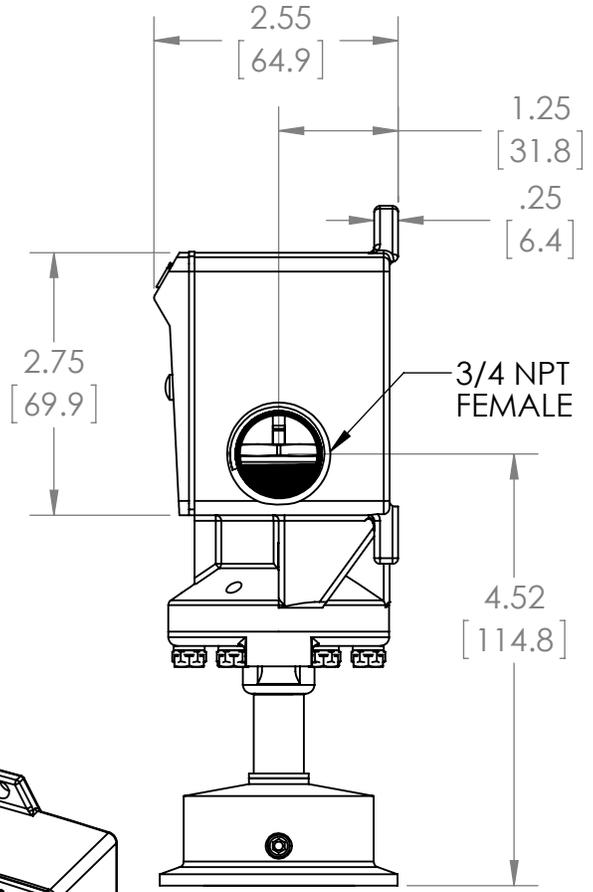

NOTE:
SINGLE & DUAL ELEMENT HERMETICALLY SEALED SWITCHES ARE SUPPLIED WITH A SET OF 12" 18 GA. LEADS.

ALL OTHER DUAL ELEMENT SWITCHES ARE SUPPLIED WITH A SET OF 6" 18 GA. LEADS FOR THE REAR MOUNTED SWITCH ONLY.

DIMENSIONS IN [] ARE MILLIMETERS

APPLICABLE SWITCH PRODUCT CODES				
SWITCH TYPE	SWITCH ELEMENT	SEAL MATERIAL	VARIATIONS	RANGE
B4	-	B, T, V	XY63A	VAC - 600 PSI

REV.	ECO	DESCRIPTION	BY	DATE
A	0007530	RELEASE GENERAL DIMENSIONS	HOY	4/20/2015

This print certified correct for
Customer's Name

General Dimensions
B4 PRESSURE SWITCH
BUNA, TEFLON, VITON DIAPHRAGM MAT'L
RANGES VAC - 600PSI - XY63A

Customer's Order No.

Drawn	HOY	Date 4/20/15	Date of Issue
-------	-----	--------------	---------------

Ashcroft Order No.

Checked	TB	Date 4/20/15	SHEET-1	Rev.
---------	----	--------------	---------	------

Certified by _____ Date _____

Approved	SSH	Date 4/20/15	70A4044	A
----------	-----	--------------	----------------	----------